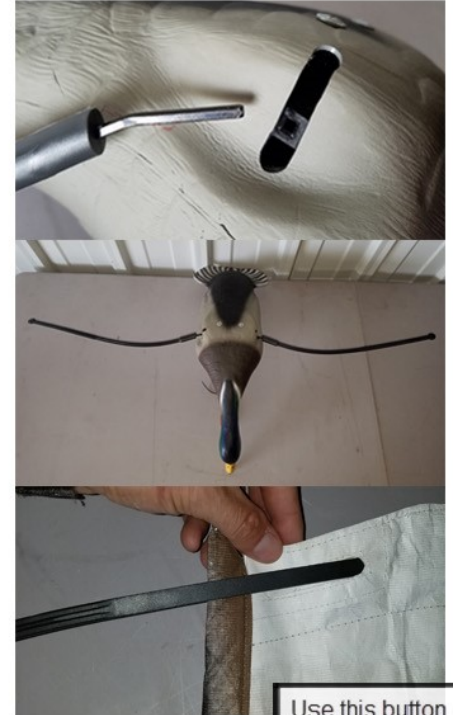

'THE CLONE'®

Directions for Bird Assembly:

1. Install wing strut in bird through wing slot in body. Square rod inserts into square hole in wing cam. Insert so curve of wing strut is facing forward (the direction the bird would be flying).
2. Insert tip of wing strut through slot in underside of wing. Make sure wing is pulled all the way up over the wing strut (up over larger diameter plastic near square rod).
3. Secure wing to body by hooking shock cord hooks in small holes located in back of bird.
4. Install stake in ground at slight angle listing downwind. This will help to keep bird flying into wind. In severe wind, loop elastic cord (located in breast of bird) over the 90 degree bend in the stand.
5. Hook up power cord by two-way connector. Connect to power source with positive and negative battery clamps.



Use this button to sync transmitter and receiver.

See instructions for specifics.

Directions for Remote System:

Note: Transmitter and receiver will come already synced. If receiver loses connection with transmitter, follow these steps to sync the two again:

1. Remove belly plug from the bird. Receiver is adhered to the foam.
2. Remove lid from receiver box.
3. In the upper right corner of receiver, locate black button with small LED light next to it.
4. While connected to power source, press and hold button for 2 seconds, then release. LED will begin to flash. Press and release the "on button" on the transmitter. LED will flash 5 times when successfully synced.

